
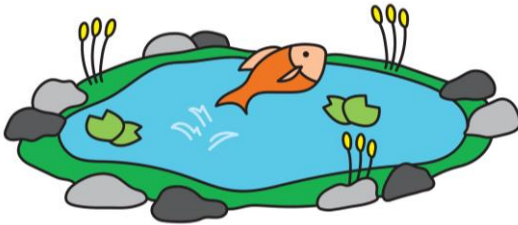


# SWIMMING POOLS, HOT TUBS, AND FISH PONDS

Construction requirements for outdoor private swimming pools (includes in-ground and above-ground pools).

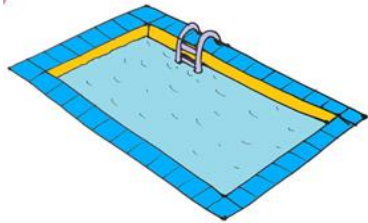


TANNER'S CROSSING  
PLANNING DISTRICT

Do I require a building permit for a swimming


## pool?

YES! A building permit is required to construct a pool or any other structure located outdoors which is capable of containing over 600 mm (2 ft.) of water.



This includes inground and above-ground pools, hot tubs, fish ponds, etc.

Permits are also required for associated construction such as decks, change houses, sunrooms, etc.



## Where can I obtain the necessary permits?

Permits may be obtained at Tanner's Crossing Planning District (TCPD) office.

## What information do I have to bring with me in order to make application for a permit?

- **For above-ground pools** TCPD requires two (2) copies of a Surveyor's Building Location Certificate. As an alternative, a well-drawn site plan may be acceptable. The plan must indicate the size and configuration of existing and proposed structures including the pool and associated structures such as decks, change houses, and sunrooms.
- **For in-ground pools** TCPD requires, in addition to the above, two (2) copies of the structural design drawings of the pool bearing the seal of a Professional Engineer registered in the Province of Manitoba.


## Where on my property can I build the pool?

The Zoning By-law requires that you locate your pool maintaining certain minimum setbacks from your property line. See Figure 1.

Note: If you are planning to construct a deck around your above-ground pool you may require a minimum 7.6 m (25 ft.) rear yard setback. (For more information see the booklet on decks.)

### FIGURE 1 - Inground Pools and Above Ground Pools

- a - Front Yard = same as principle building usually 25 ft
- b - Side Yard - .3m or 1ft
- c - Corner Side Yards vary – contact TCPD
- d - Rear Yard - .6m or 2 ft

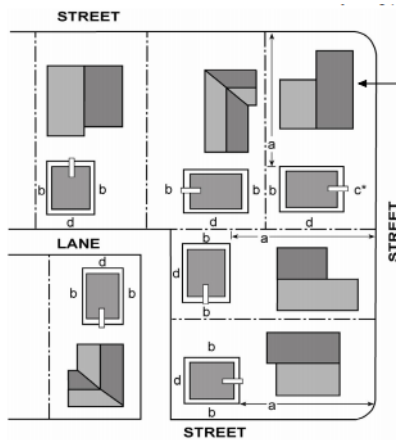

### Where can I locate my pool heater and pump?

Pool heaters and pumps may be located beside or behind your house as long as they are not closer than 4.6 m (15 ft.) to an openable window of a habitable room in your neighbour's house and are at least 600 mm (2 ft.) from a property line.

**NOTE:** Certain **gas heaters** and **chimneys** may have restrictions on their location based on a minimum distance

from nearby combustible materials. Consult with your gas utility company with regard to gas installation codes which may apply.


## Are overhead and underground conductors a cause for concern?

YES! Overhead power supply, communication and antenna distribution conductors NOT exceeding 750 volts crossing a pool cannot be less than 5 m (16'5") above the swimming pool, diving structure, slide, observation stand, tower or platform. This area applies to the area extending 5 m (16'5") horizontally from the pool edge. (See FIGURE 3)

No conductors are permitted in the area under Line 1 in the diagram below.

For High Voltage power supply conductors exceeding 750 volts and specific requirements associated with underground wiring close to pools please refer to the Manitoba Electrical Code or contact Manitoba Hydro.

**FIGURE 3 - Overhead Conductors Less Than 750 Volts**

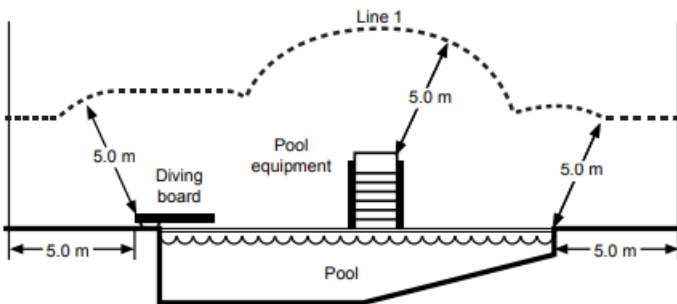

## Are there any bonding requirements for swimming pools?

YES! All metal parts of a swimming pool and other non-electrical equipment associated with the pool including piping, pool reinforcing steel, ladders, diving board supports, etc., must be bonded together. Bonding and grounding of metal parts must be provided in accordance with the requirements of the Manitoba Electrical Code.

The reason for connecting these parts together with a bonding conductor is to ensure that all such metal parts will be at the same electrical potential. This will reduce any possible shock hazard created by stray currents in the ground or piping.

The bonding conductor shall be run to the panel board supplying pool equipment and not smaller than #6AWG copper.

### **Are there requirements regarding receptacles, lighting fixtures, and other electrical equipment near a pool?**

YES! Receptacles cannot be located within 1.5 m (5 ft.) of the pool edge. As well, all receptacles located from 1.5 m to 3 m (5 ft. to 10 ft.) from the edge of the pool must be protected by an approved ground fault circuit interrupter (GFCI).

Lighting fixtures and other electrical equipment located within 3 m (10 ft.) measured both horizontally and vertically from the pool edge, must be protected by an approved ground fault circuit interrupter.

The ground fault circuit interrupter helps protect people from electrical shock. This device can detect when a faulty piece of electrical equipment has a potentially dangerous leakage of electrical current. When such a leakage of current is detected the ground fault circuit interrupter operates by disconnecting the power to the equipment. This device should be tested routinely to ensure proper operation.

## How will I know that my electrical equipment has been properly installed?

An electrical permit is required for all pool wiring. Consequently, the pool contractor generally hires an electrical contractor who will perform the required work. The electrical contractor can obtain the necessary permit for your pool installation. Upon completion of the wiring, a Manitoba Hydro Inspector will check for proper electrical installation.

***If your pool wiring has not been inspected, contact Manitoba Hydro.***

## What are the requirements for fencing and gates?

The following requirements for fencing and gates have been extracted from the Town of Minnedosa Zoning By-law on Private Swimming Pools.

All outdoor pools must be completely enclosed with a fence or other suitable barrier constructed in accordance with the following requirements:

- a) it must have a minimum vertical height of 1.5 m (5 ft.) and a maximum vertical height of 1.85 m (6 ft.);
- b) there must be no openings, other than a door to a building or a gate as described in requirement (c) below, and it must not be possible for a child to crawl under either the fence or the gate;
- c) any gate must be self-closing, must be at least 1.5 m (5ft.) in height, and must be equipped with a (self-latching) lockable latch to prevent unauthorized entry;
- d) where chain link is used, the mesh size must not exceed 50mm (2 in.) and the wire must be at least number 11 gauge;
- e) where other than chain link is used, the outside surface of the fence or gate must be relatively smooth so as not to provide foot or toe holds to enable climbing over it;

- f) it is not permitted to fill the pool with more than 600 mm (24 in.) of water before the fencing has been completed. Permission may be granted to erect temporary fencing while the permanent fencing is being constructed. Contact TCPD for more information
- g) if, in the opinion of the authority having jurisdiction, there is any undesirable feature pertaining to the enclosure, suitable steps must be taken to correct the situation.

Furthermore, it is a requirement that the fence be maintained in good repair.


### Are vehicle gates acceptable as part of the fencing?

The use of vehicle gates as part of the pool enclosure is not recommended. These gates are often too large and too heavy to be automatically closed with most existing hardware. Pairs of gates are also discouraged unless they can be made to close and latch automatically.

The illustrations found on this and the following page are intended as guides in meeting the requirements for construction fences and gates. They are offered as suggestions only. Other alternatives may be used as long as they meet the intent of the Building Code.

### Do all pool gates require this special hardware even if they are seldom used?

All pool gates require the special hardware.

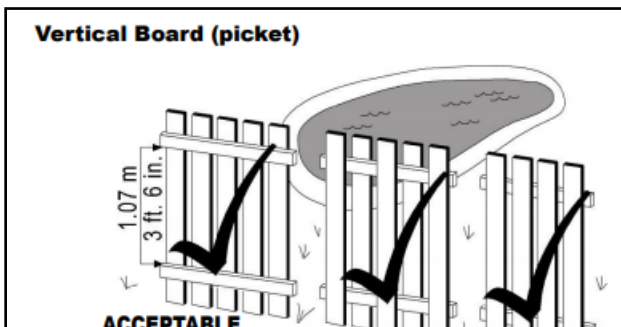

### NOT ACCEPTABLE


- When building this type of fence avoid closely spaced horizontal rails.
- The fence should not be climbable.



**NOTE:** No style of fence should allow more than 100 mm (4 in.) between the ground and the bottom of the fence.


### Wooden Lattice and Horizontal Board

Maximum openings  
50 mm (2 in.)



#### ACCEPTABLE

- Place horizontal straps on the inside of the fence.




#### NOT ACCEPTABLE

- There can be no more than 1/2" space between horizontal boards.

### Wrought Iron

100 mm  
(4 in.)

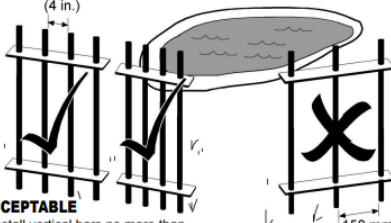

#### ACCEPTABLE

## SELF-CLOSING DEVICES:

These are defined as devices which will cause any gate to return to a closed position without the aid of a push or pull from a person. The gate must close automatically to prevent unauthorized entry into the pool area. Self-closing devices must be kept in good repair. Illustrated below are three commonly used types of closers designed to close the gate automatically.


**REMEMBER:**

*These requirements are intended to prevent unauthorized entry of those persons too young to understand the dangers of your pool.*




## AUTOMATIC LATCHES:

These are latches which become automatically secured upon contact with the closing gate. Some commonly used types are illustrated below.



---

**EXAMPLE OF A SELF-CLOSING/AUTOMATICALLY LATCHING GATE:**

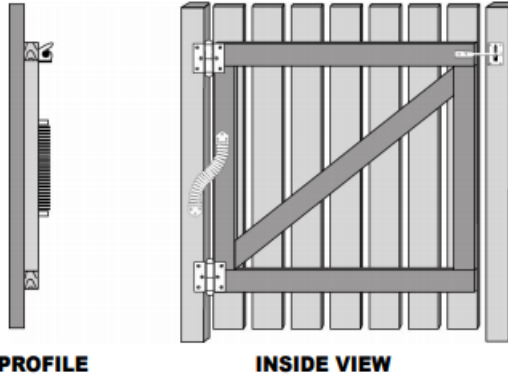

If a latch cannot be installed on the inside of the gate, install it at a safe height at the top of the gate where it cannot be easily reached by younger persons.

---

**UNACCEPTABLE LATCH:**



- This latch has to be manually engaged.
- It could impair the gate from self-closing and securing.

## Are there any precautions that should be taken when filling the pool with water?

YES! It is possible that a garden hose used to fill the pool and left submerged in the water could cause the water supply to the house to become contaminated. A temporary loss of pressure in the public water system could cause the pool water to be drawn by siphon action into the water supply lines

in your house. This can be prevented by keeping the end of the hose out of the pool water during filling of the pool or by screwing a small device called a hose bib vacuum breaker onto the outside water tap. The hose bib vacuum breaker will prevent the water from flowing in a reverse direction. It may be purchased from any plumbing supply store.

## **Who is responsible for meeting all of the pool regulations?**

It is the responsibility of the OWNER to ensure that these regulations are met, in particular that the fencing is in good repair and that the pool area is securely maintained at all times.

## **Who enforces all of these requirements?**

The Building Official/Development Officer of TCPD is assigned the responsibility of monitoring construction for compliance with the various Building Codes and By-laws. This monitoring is carried out by means of the permit approval process and periodic site inspections.

## **Is there any way that compliance with a certain aspect of the Building Code can be waived?**

The Building Official does not have the authority to waive the requirements but it does have the authority to accept equivalencies which meet the intent of the Building Code. If you feel you can satisfy a Building Code requirement by using an equivalent material or construction method, contact your Building Official.

# **Contact Us**

## **Tanner's Crossing Planning District**

PO Box 1072  
2nd Floor, Civic Centre  
103 Main Street South  
Minnedosa, MB  
R0J 1E0  
Phone: 204.867.2364  
Cell: 204.868.5973  
Email: [tcpd@mymts.net](mailto:tcpd@mymts.net)

[www.discoverminnedosa.com/business/planning-development/](http://www.discoverminnedosa.com/business/planning-development/)



Find Us on Facebook

Or contact the member jurisdictions of Tanner's Crossing Planning District:

### **Town of Minnedosa**

103 Main Street South  
Minnedosa, MB  
R0J 1E0  
Phone: 204.867.2727

### **R.M. of Minto-Odanah**

49 Main Street South  
Minnedosa, MB  
R0J 1E0  
Phone: 204.867.3282

20260312